

**PRODUCT DESCRIPTION**

Anaerobic adhesive **B-80** is a single component adhesive, which contains acrylic and methacrylic esters, organic peroxides.

The product cures when deprived of contact with oxygen in the presence of metal ions.

**APPLICATION**

- Sealing of threaded and fitted connections
- Securing against loosening and corrosion of threaded connections
- Assembling of large diameter bearings


**PROPERTIES**

Form	liquid
Density [g/cm <sup>3</sup> ] at 25 °C	1,15
Colour	orange
Viscosity [MPa] at 25 °C	8000 ÷ 10000
[spindle 5, 30 rpm (DIN 54453)]	


**TYPICAL CURING PERFORMANCE**

**Cure speed vs substrate**

The graphs show the increase in breaking torque screw connection as a function of time for different types of substrate. The tests were performed in accordance with the standard ISO 10964 using M10 bolts and nuts coarse thread

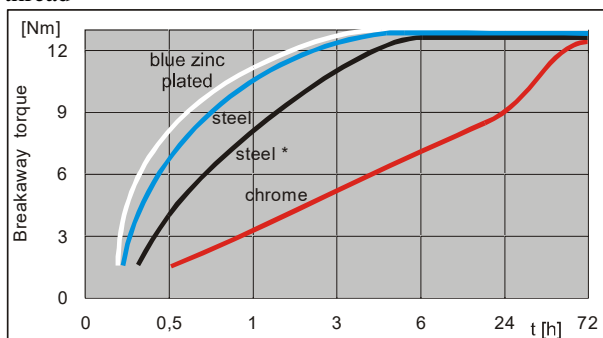


steel\* – tough steel

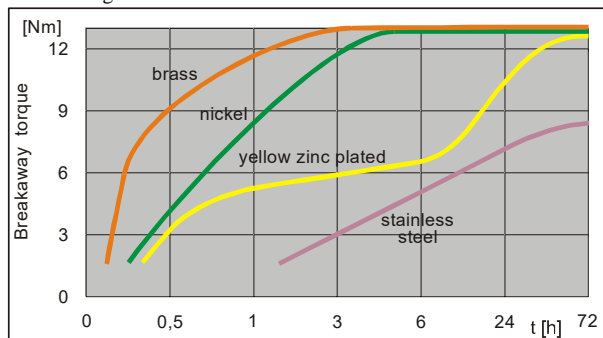


**Curing speed when applied activator A**

The graph shows the increase in the breaking torque of threaded connection as a function of time at using activator A. The tests were carried out in accordance with to ISO 10964 using M10 bolts and nuts coarse thread.

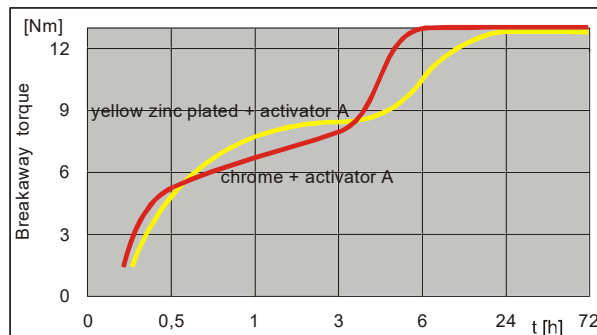


**Cure speed vs. temperature**

The graph shows the increase in the breaking torque of threaded connection as a function of time for different ambient temperature values. The tests were carried out in accordance with to ISO 10964 using M10 bolts and nuts coarse thread.

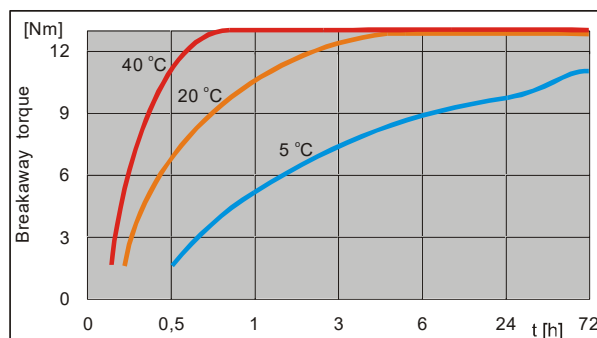

**Cure speed vs. bond gap**


The graph shows the increase in compression shear stress as a function of time for different size of bond gap. The tests were carried out in accordance with to DIN 54452.

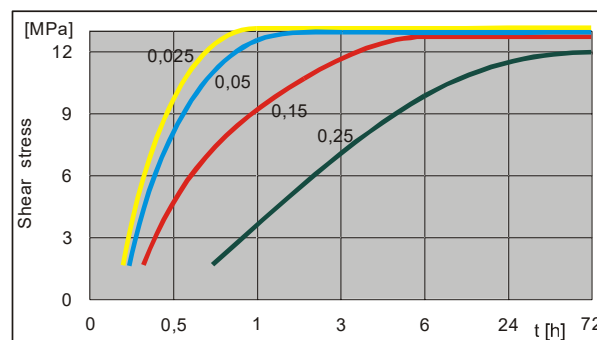

**Cure speed on aluminum vs. bolt material**

The graph below shows the increase in breakaway torque as a function of time for different bolt materials. Developed on M10 coarse thread bolts and tapped holes in aluminum alloy.

The tests were based on the ISO 10964

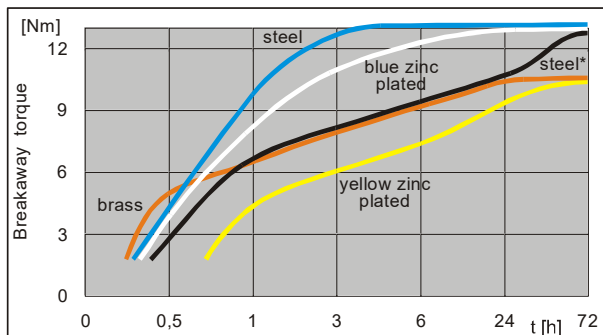

steel\* – tough steel

**PHISICAL PROPERTIES OF CURED MATERIAL**

Coefficient of thermal expansion [1/K] ca. **8x10<sup>-5</sup>**  
 Coefficient of thermal conductivity [W/mK] ca. **0.1**  
 Specific heat [J/kgK] ca. **300**

**PERFORMANCE OF CURED MATERIAL**

Breakaway torque [Nm] [ISO 10964 (3.3)]

Value: 13

Range: 9-18

Prevail Torque [Nm] [ISO 10964 (3.5)]

Value: 6

Range: 4-8

Shear strength [MPa][DIN 54452]


Value: 13

Range: 9-17

The above-mentioned parameters were determined after 72 h curing at the temperature of 22 °C using M10 steel coarse thread bolts and nuts and calibrated shaft and hubs pairs.

**Breakaway torque vs thread size**

The graph below shows the maximum breakaway torque for different sizes of connection threads. The tests were carried out on steel coarse thread bolts and nuts after 72h curing at 22°C. Tested according to ISO 10964.

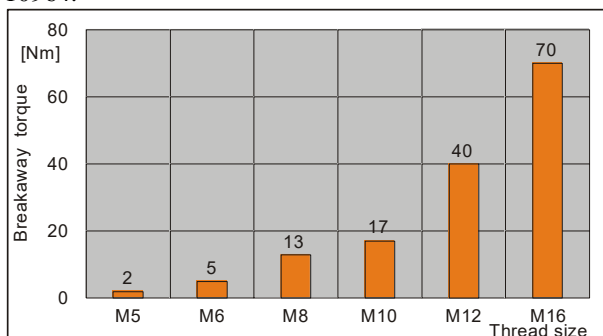

**TEMPERATURE RESISTANCE**


The tests were carried out after 72h curing at 22°C

**Breakaway torque vs temperature**


The graphic presentations show the change of breaking torque of a threaded connection as a function of temperatures for various types of substrate. The tests

were carried out on M10 steel coarse thread bolts and nuts.

Tested according to ISO 10964 at temperature

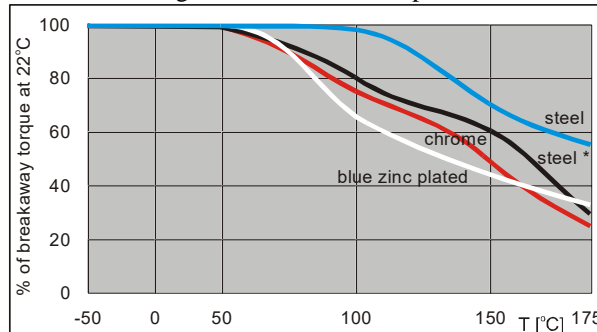


steel\* – tough steel

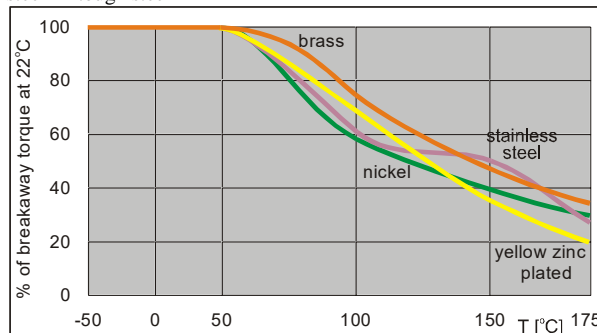

**Breakaway torque vs temperature (for aluminum and various materials bolts)**


The graphic presentations show the change of breaking torque of a threaded connection as a function of temperatures for various types of bolt substrate. The tests were carried out on M10 steel coarse thread bolts and nuts.

Tested according to ISO 10964 at temperature

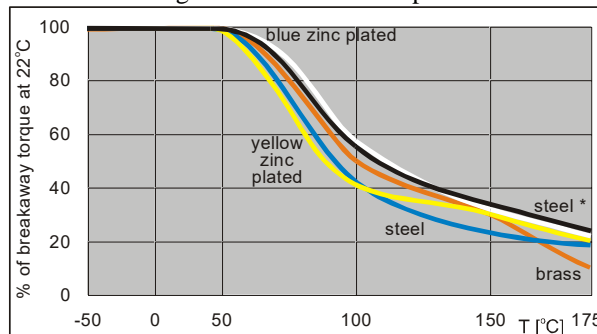

**Breakaway torque of a threaded connection as a function of time at elevated temperatures (Heat Aging)**

The graphic presentations show the change of breaking torque as a function of time at various temperatures.. The tests were carried out on M10 steel blue zinc plated coarse thread bolts and nuts. Tested according to ISO 10964. Parts are aged at temperature indicated and tested at 22°C


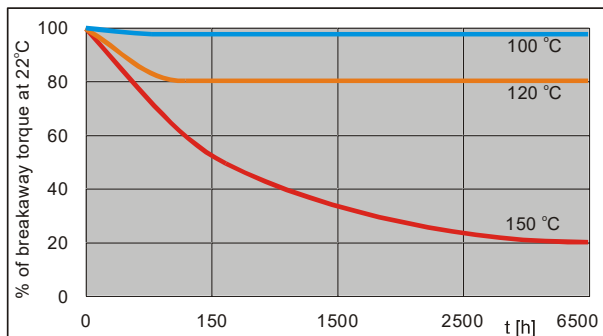


## CHEMICAL RESISTANCE

The tests were carried out after 72h curing at 22°C

### Breakaway torque of a threaded connection as a function of time

The tests were carried out with the use of coarse thread M10 galvanized bolts and nuts. The elements prepared in this way were immersed in a medium with a temperature of 22 °C or indicated in the diagram. The graphs show the change of breakaway torque of a threaded connection as a function of time for various types of media. The breakaway torque of a threaded connection were tested according to ISO 10964 at 22 °C

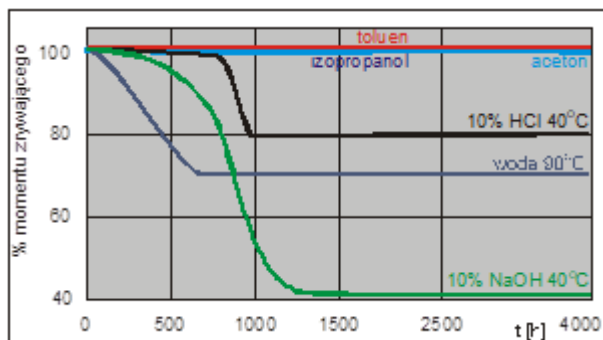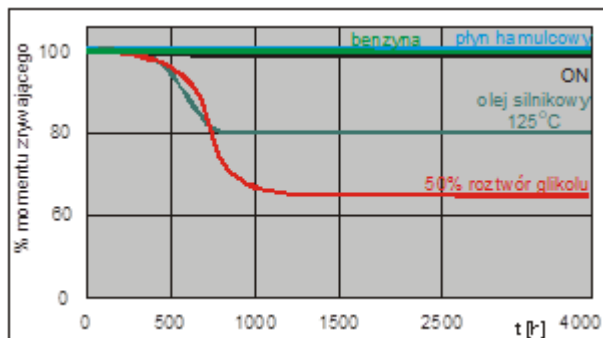

## Chemical resistance short table

Solvent	Chemical resistance
Sodium hypochlorite	+
Butanol	+
Methanol	+
Phosphoric acid 10%	+
Glycerine	+
Paraffin	+
Ethanol	+
Nitric acid 10%	+
Vinegar acid 10%	+
Amine	+
Phenol	+
Hydroxypropionic acid	+
Salt water	+
Ethanol	+
Natural gas	+
Ammonia	-
Chlorine	-
Oxygen	-


+ - can be used unreservedly

- - not recommended

The complete Resistance Table for CHESTER anaerobic materials can be found on our website.

## Pressure-tight of thread connections.

The diagram shows the amount of pressure unsealing the connection as a function of the thread diameter. The tests were carried out with the use of connectors covered with a yellow chromate layer with threads made in accordance with ISO 228-1. The pressure tests were carried out at the temperature of 20 °C with the use of water.

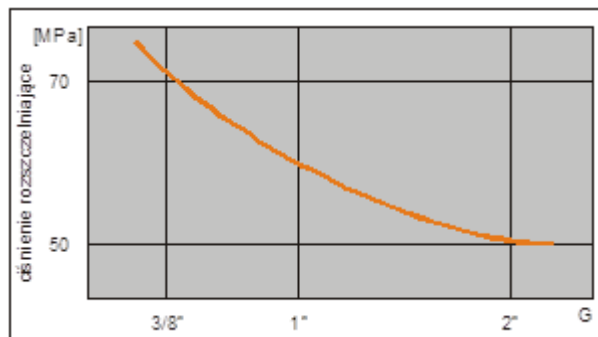

## **OTHER INFORMATION**

### **Storage**

Product should be stored in closed, original containers at a temperature between +5°C to +28°C.

Because of the curing mechanism anaerobic adhesives are delivered in packages partly filled with an adhesive. Air space in bottle is required to keep contents liquid. Keep in dry and clean place.

### **Instruction for use**

The applied surfaces should be cleaned and free of grease. The adhesive should be spread only through the batching tip. Do not dip nuts, bolts, metal parts, paste brushes or any other things in the bottle with an adhesives. If the process of curing the adhesives is not satisfactory by reason of low temperature, big bond gap or inactive material, **Aktywator A** of Chester Molecular should be applied.